

# TECHNICAL DATA SHEET

<b>PRODUCT:</b>	T Track & T Track Cover ( <b>New 2025 Version</b> )
<b>RANGE:</b>	Hanging Systems – Extrusion
<b>MATERIAL:</b>	Aluminium alloy grade 6063 – T6
<b>FINISH:</b>	<b>Powder Coated White</b> - Lead free durable polyester powder coat, satin finish - for interior use. Or <b>Anodised Silver</b> - Natural silver oxide, matt finish - for interior use. Custom Finishes also available.
<b>CODE:</b>	<b>H6200WV2</b> (white, no cover) / <b>H6200SV2</b> (silver, no cover)
<b>COO:</b>	UK

## PRODUCT DESCRIPTION:

T Track is an aluminum extrusion, 2500mm long designed to feature as a recess above wall panels. This track can be installed during construction or retrofitted. Wall structural support must be considered, see below. This track is used where it is necessary to project the support point forward. This will predominantly apply where joinery, fabric or stone panels are installed, and the use of the T Track allows for artworks to be hung down the face of the panel via T Track Hanging Sets (sold separately), without fixing to the panel itself.

Absolute's T Track can support heavy artworks and if this is the intention, it is important that you consider the structural integrity of the wall itself, to ensure it can support everything you wish to display (see below\*).

Once the T Track is installed, all evidence of fixings can be discreetly hidden using the T Track cover. The track is supplied with connecting pins which are inserted into the end of each piece of track to ensure excellent alignment when installing a continuous run.

## FIXING & WEIGHT CAPACITY:

T Track is supplied pre-drilled with countersunk holes at 300mm centres ready for fixing to the wall. When installed onto the appropriate substructure (see below\*) it can support artworks up to 150kg each. Multiple artworks per section of track can be supported, up to 150kg per linear metre. If you intend to hang artworks heavier than 150kg, T Track is also available drilled at 150mm centres. In this instance, we recommend verifying the wall structure is also capable of supporting the intended weight. Please contact us for advice.

**\*Required Substructure:** The track should be fixed to continuous hardwood or plywood platens within the wall structure to support the load. (i.e. fixing only into plasterboard or drywall will not suffice for heavy loads).

## HANGING ARTWORKS:


Hanging Sets can be added at any point along the track, as the T Track top blocks are front loading straight into the track channel, which you then attach artworks to.

All artworks should be hung on two suspended supports each (One T Track Hanging Set), allowing the weight to be equally distributed between the supports (therefore up to 75kg point load on the track). Please contact us for advice and guidance on supporting unusually heavy artworks.

### CARE & MAINTENANCE:

For both finishes, an occasional wipe with a damp cloth will keep the surface clean and presentable. In the instance of any grime or grease build up we recommend a non-abrasive proprietary detergent-based product.

### DRAWING DETAILS:

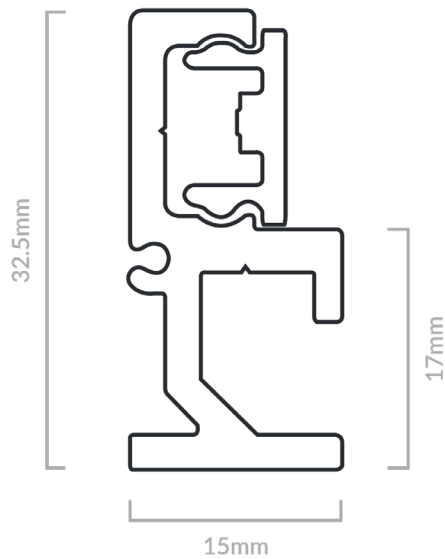

### YOU WILL ALSO NEED:

**H Track Hanging Sets** – these are sold separately as the type and quantity of hanging sets you require will vary depending on the artworks to be installed. **Note:** For artworks over 60kg, our Stainless-Steel Rod Hanging Sets (sold separately) should be used. See 'H Track Hanging Sets' for further information.

### FOR FURTHER INFORMATION PLEASE CONTACT:

Tel: 44 (0) 1769 572389 | [sales@absoluteproduct.com](mailto:sales@absoluteproduct.com) | Absolute Museum & Gallery Products, The Hub, Pathfields Business Park, Station Road, South Molton, Devon, EX36 3LL